



# ACROLINK

99.99999% Cu Stressfree Interconnect cable


## 7N-A2400III



RCA

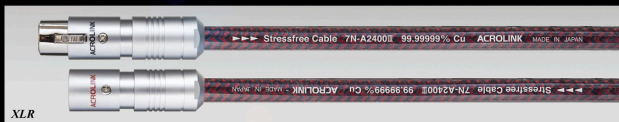

XLR



AES/EBU

**Conductor:** *D.U.C.C Stressfree 7N 0.260 x 19 strands*

**Insulation:** *Hybrid polyolefin*

**Inner sleeve:** *Hybrid polyolefin with amorphous*

**Shielding:** *UEW urethane + brass tape*

**Outer sleeve:** *UV resistant Polyurethane*

**Conductor resistance:** *17mΩ/m*

**Electrostatic capacitance:** *69pF/m*

**Impedance:** *110Ω (AES/EBU)*

**Cable diameter** *10.0mm*

### RCA Plug

**Center contact pin:** *Hollow shaped Tellurium copper*

**Negative side contact:** *Beryllium copper*

**Plating:** *Direct rhodium*

**Cover:** *Aluminum + carbon fiber*

### XLR Connector

**Contact part:** *Phosphor copper*

**Plating:** *Direct rhodium*

**Outer body** *Brass machined out from solid brass*