


ACROLINK

99.99999% Cu Stressfree Mexcel Power Cable

7N-PC9500 MEXCEL



UL version

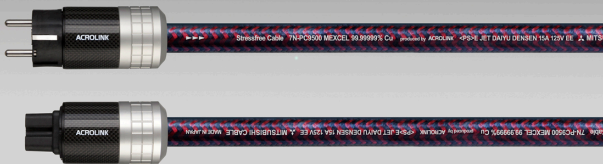

Schuko version

Conductor:	<i>D.U.C.C Stressfree 7N MEXCEL 0.32ø x 50 strands</i>
Insulation:	<i>Macromoleculu polyolefin</i>
Inner sleeve:	<i>Macromoleculu polyolefin + tungsten + amorphous + carbon powder</i>
Shielding:	<i>UEW (Urethane Enameled Wire) + semi conductive tape</i>
Outer sleeve:	<i>UV resistant Polyurethane</i>
Conductor resistance:	<i>2.0mΩ/m</i>
Electrostatic capacitance:	<i>10pF/m</i>
Cable diameter	<i>16.0mm</i>

Power plug & IEC connector

Contact parts:	<i>Beryllium copper</i>
Plating:	<i>Silver + Rhodium (mirror polished before plating)</i>
Body:	<i>Special resin + brass + carbon fiber + aluminum</i>