

ACROLINK®

7N Cu SPEAKER CABLE SERIES
Stressfree 99.99999% Purity Copper

7N-S8000 Anniversario

BANANA PLUG/SPADE LUG



SPECIFICATIONS


Conductor	: 7N Cu D.U.C.C Stressfree 0.37mm×50strands×2cores
Insulation	: PTFE Teflon tape + Polyethylene resin
1st sleeve	: Hybrid polyolefin (with tungsten & amorphous powder)
Shielding	: Noise Beat Tape + Copper clad mylar tape
2nd sleeve	: High molecule polyolefin
Outer shielding	: UEW braided wire
Outer sleeve	: UV resistant Polyurethane
Conductor resistance	: 2.5mΩ/m
Electrostatic capacitance	: 17pF/m
Cable diameter	: 18.7mm

BANANA PLUG

Material	: Beryllium 50 copper
Plating	: Silver layered rhodium plating
Outer body material	: Duralumin

SPADE LUG

Material	: 6N Cu copper
Plating	: Silver layered rhodium plating
Outer body material	: Duralumin

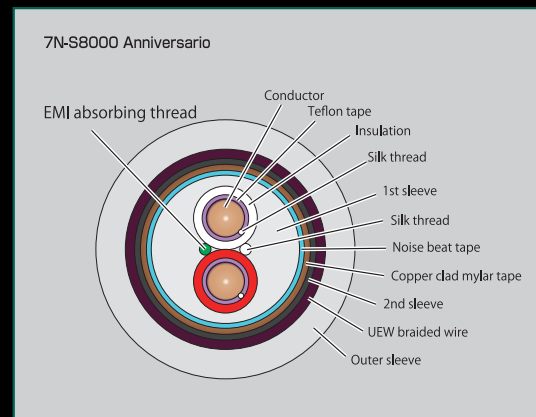

- Standard length for this speaker cable will be 2.0m pair.
- Special length order available. Please specify terminations when ordering.

※Noise BEAT tape is EMI noise reduction tape using magnetic alloy films. This tape is developed by NTT AT Corporation (Nippon Telegraph and Telephone Corporation Advanced Technology).